



## VRLA Rechargeable Battery

# BPL33-12 (BPL33-12FR)

### Handle Type



### FEATURES

- Maintenance free(no water topping-up required).
- No free acid(Non-spillable battery).
- Low self-discharge rate, lower than 3% capacity loss per month.
- Can be used in any orientation(excluding used inverted).
- Absorbent Glass Mat technology for efficient gas recombination.

### APPLICATION

- UPS
- Wheelchairs
- Lawn Mowers
- Electronic Medical Equipment
- Golf-Carts



### SPECIFICATIONS

Nominal Voltage	12 V
Nominal Capacity	33Ah @ 20 hour rate F.V.(1.75V/cell)
Approx. Weight	11.5Kg(25.36lbs.)
Terminals	B7 (Fitting M6 bolt & nut) I2 is optional
Internal Resistance	≤9.0mΩ (Fully Charged)
Max. Discharge Current	495 A (5 sec.)
Max. Charge Current	9.9 A
Operating Temperature Range	Charge : 0°C~40°C(32°F~104°F) Discharge : -20°C~50°C(-4°F~122°F) Storage : -20°C~40°C(-4°F~104°F)
Container Material	ABS(UL94-HB, UL94-V0 is optional)



ISO 9001	
ISO14001	
UL	
CE	
<ul style="list-style-type: none"> <li>● IEC 61056-1</li> <li>● JIS C 8702-1</li> <li>● GB/T 19639.1</li> </ul>	

### DIMENSION(mm/inch)

### OUTER DIMENSIONS

### TERMINAL TYPE

- **Length**  
210±1.5 (8.27±0.06)
- **Width**  
129±1.5 (5.08±0.06)
- **Container Height**  
168±1.5 (6.61±0.06)
- **Total Height**  
B7:179±2.0 (7.05±0.08)  
I2:168±2.0 (6.61±0.08)

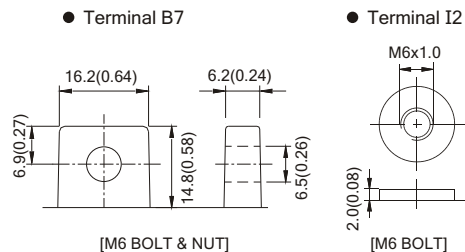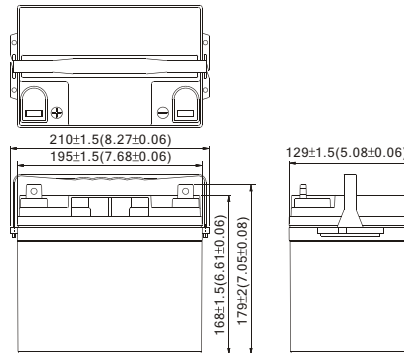

Terminal Hardware Initial Torque: B7/I2 5.5Nm±5%

### Constant power discharge characteristics at 25 °C/77 °F Unit: W

F.V. (V/cell) \ Discharge Time	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	1075.0	808.0	654.3	393.6	228.2	96.2	66.50	37.05	19.38
1.75V	1245.0	875.4	685.0	408.7	234.8	98.1	67.40	37.62	19.80
1.70V	1320.0	907.0	705.7	417.7	239.0	99.0	67.90	37.81	19.89
1.65V	1381.0	928.7	722.2	423.8	242.3	99.9	68.40	37.90	19.94
1.60V	1424.0	947.1	736.4	428.1	244.7	100.4	68.40	37.90	19.94

### Constant current discharge characteristics at 25 °C/77 °F Unit: A

F.V. (V/cell) \ Discharge Time	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	96.8	71.1	56.9	33.4	19.2	8.02	5.54	3.09	1.62
1.75V	114.2	77.1	59.6	34.6	19.7	8.18	5.62	3.14	1.65
1.70V	121.1	79.8	61.4	35.4	20.1	8.25	5.66	3.15	1.66
1.65V	126.7	81.8	62.8	35.9	20.4	8.33	5.70	3.16	1.66
1.60V	130.6	83.4	64.0	36.3	20.6	8.37	5.70	3.16	1.66

All data shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.